



An  
Employee  
Owned  
Company

# 30-Gallon

## Air Compressor/ Generator Combinations

*Two Stage — Diesel*



AG2-SKD9-30M

*The diesel combination unit has the convenience of two machines in one, providing power for most any industrial and contractor need.*

#### COMPRESSOR PUMP

- Cast iron compressor pump
- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

#### GENERATOR

- Brushless alternator
- Total harmonic distortion (THD) less than 6%
- 100% copper windings
- (2) NEMA 5-20R 120V, 20A and (1) NEMA L6-20R 240V, 20A receptacles

#### ENGINE

- Electric start – battery, box and cables not included
- Glow plug equipped for easy starting in cold temperatures

#### FRAME

- Powder coated ASME receiver tank
- 3/16-inch base plate to reduce vibration
- Powder coated two-piece belt guard

#### COMPONENTS

- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 16½-inch fly wheel
- Quality pilot valve unloader

#### LIMITED WARRANTY

- 3 year engine

#### CERTIFICATION

- ASME Boiler and Pressure Vessel Code – UM



# 30-Gallon

## Air Compressor/Generator Combinations – Two Stage – Diesel

MODEL NUMBER	CFM @ PSI	CFM @ PSI*	MAX. AC OUTPUT	ALTERNATOR WATTAGE		HORSEPOWER/ENGINE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
				CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				
AG2-SKD9-30M	16.4 @ 90	15.7 @ 175	3000 watts	2300 watts	3000 watts	9.1 HP Kohler KD440 OHV	41x23x47in.	554 lb.	489 lb.

\*Equipped with 150-PSI maximum rated regulator.

### ACCESSORIES:

PART NUMBER	DESCRIPTION	FITS MODEL
70-0380	Engine oil drain extension – 14-inch flexible drain hose makes oil changes clean and easy	AG2-SKD9-30M
AW-6000-1002	Equipment cover – Keeps your equipment clean, dry and looking like new	AG2-SKD9-30M

### OPTIONS:


PART NUMBER	DESCRIPTION	FITS MODEL
AX-0016	Battery, battery tray, box and 2-foot of cables – Attaches to engine side of unit	AG2-SKD9-30M
AX-0070	Battery tray, box and 2-foot of cables – Attaches to engine side of unit	AG2-SKD9-30M
IX-0001	Vibration isolator pads – Isolators protect the unit from vibration during use. Recommended for models mounted in service truck applications	AG2-SKD9-30M



NEMA 5-20R  
125V



NEMA L6-20R  
240V

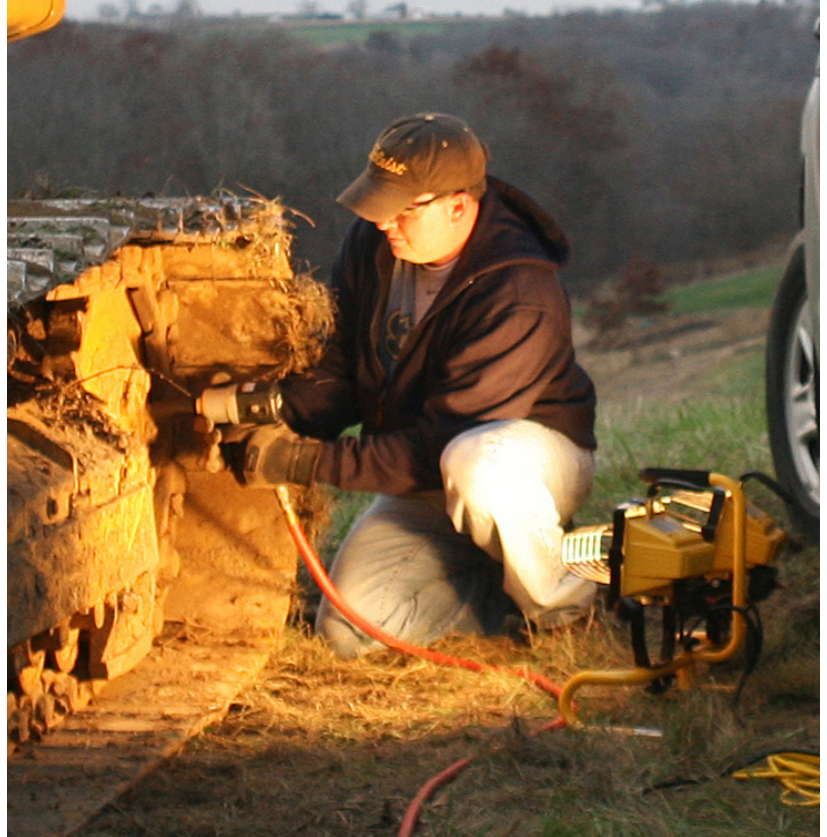

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).