

8-Gallon / Base-Mount Single or Two Stage – Gasoline

Compressor Pump:

Cast iron compressor pump | Splash lubricated |
Stainless-steel braided discharge hose | Large canister
intake filter | Oil level sight indicator

Generator:

Brushless alternator | Total harmonic distortion (THD) less
than 5% | 100% copper windings | Comes standard
with (2) 120V, 20A and (1) 240V, 20A receptacles
(Two-stage models)

Frame:


Powder coated 8-gallon
twin tank receivers
(Portable and stationary
models) | 3/16-inch base
plate to reduce vibration |
16-gauge powder coated
two-piece belt guard |
13-inch flat-free tires (Two-stage
portable models) (10-inch on
AG1-PH65-08M1)

Components:

Regulator and two gauges for tank and
outlet pressure | Manual drain valves for
proper maintenance | 12 or 16 1/2-inch fly
wheel | Quality pilot valve unloader

Limited Warranties:

1 year Mi-T-M engine | 2 year alternator |
2 year pump exchange (see page 73 for
more information) | 3 year Honda and
Kohler engines

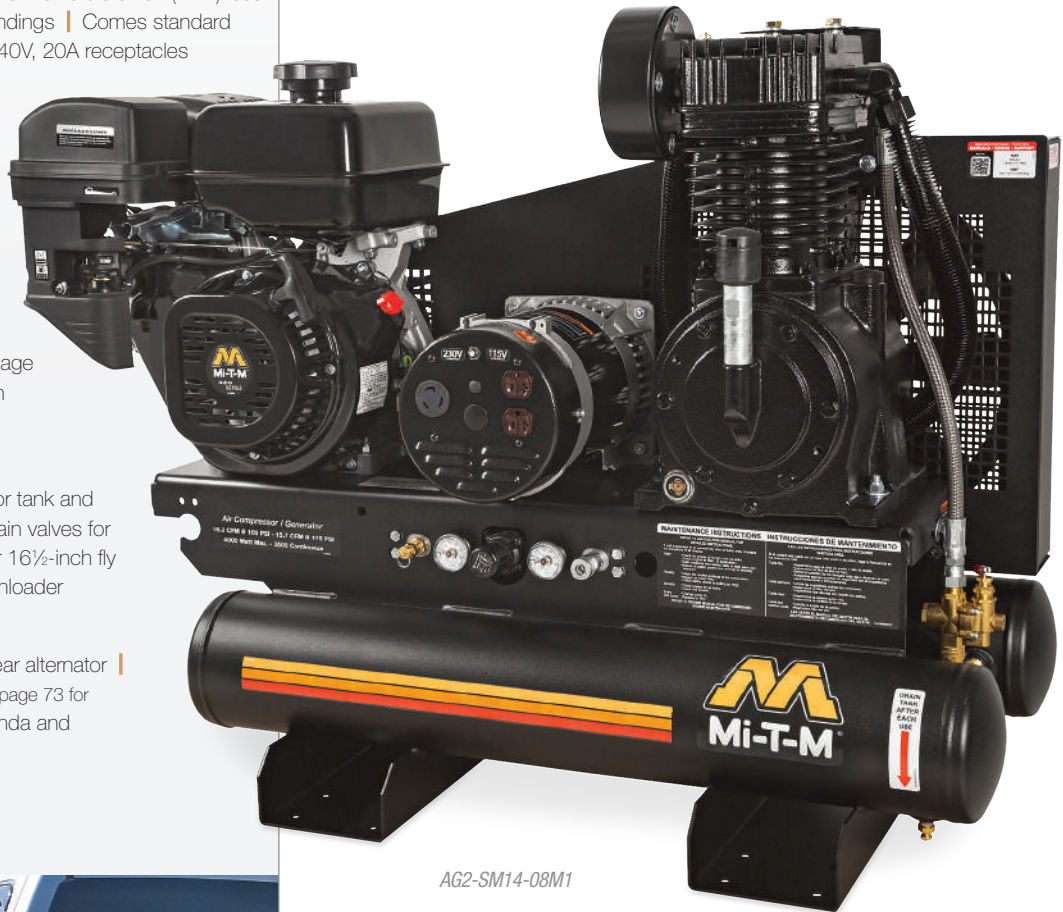

AG2-SM14-08M1



NEMA 5-20R,
125V



NEMA L6-20R,
240V

Increase your productivity by merging two vital pieces of equipment into one versatile machine. Ideal for every industrial application requiring both air and electrical power, you'll save space and save money with one machine. Available in stationary, base-mount or portable. Choose the model that best fits your needs.

8-Gallon / Base-Mount

Single or Two Stage – Gasoline

PORTABLE MODELS		ALTERNATOR WATTAGE					RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
MODEL NUMBER	CFM @ 90 PSI	CFM @ PSI	MAX. OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD							
AG1-PH65-08M1	11.9	10.9 @ 125	1800 watts	600 watts	1600 watts	(2) NEMA 5-20R	196cc Honda GX200 OHV	Single stage	44.5x26x27.5in.	257 lb.	207 lb.	
AG2-PH13-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	52x28x34in.	450 lb.	375 lb.	
AG2-PK14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	52x28x34in.	450 lb.	375 lb.	
AG2-PM14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	52x28x34in.	450 lb.	375 lb.	

STATIONARY MODELS		ALTERNATOR WATTAGE					RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD							
AG2-SH13-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	44x22x34in.	465 lb.	365 lb.	
AG2-SK14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	44x22x34in.	465 lb.	365 lb.	
AG2-SM14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	44x22x34in.	465 lb.	365 lb.	

BASE-MOUNT MODELS		ALTERNATOR WATTAGE					RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD							
AG2-SH13-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	47x22x28in.	390 lb.	325 lb.	
AG2-SK14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	47x22x28in.	390 lb.	325 lb.	
AG2-SM14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	47x22x28in.	390 lb.	325 lb.	

*Equipped with 150-PSI maximum rated regulator.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
70-0357	Engine oil drain extension	AG1-PH65-08M1	AX-0072*	Electric start - battery box and cables included, battery not included	Kohler models
70-0358	Engine oil drain extension	Two stage models	AX-0073	Electric start - battery, box and cables not included	Mi-T-M engine models
854-0093	Service truck mount kit - recommended for models that are mounted in service truck applications	Two stage portable & stationary models	AX-0074*	Electric start - battery box and cables included, battery not included	Mi-T-M engine models
AW-6000-1002	Equipment cover	All models	AX-0075	Idle down - includes electric start - battery not included	Mi-T-M engine models
AX-0019	Electric start - battery, box and cables not included	Two stage Honda models	IX-0055	Remote start/choke: 6-ft. wire extension for key switch. You will also need to order electric start option, AX-0019 or idle down option, AX-0068.	Two stage Honda models
AX-0028	Lifting hook	Two stage portable & stationary models	IX-0059	Remote start/choke: 6-ft. wire extension for key switch, sealed cable. You will also need to order electric start option, AX-0019 or idle down option, AX-0068.	Two stage Honda models
AX-0063	Lifting hook	Base-mount models			
AX-0064*	Electric start - battery box and cables included, battery not included	Two stage Honda models			
AX-0068	Idle down - includes electric start - battery not included	Two stage Honda models			
AX-0071	Electric start - battery, box and cables not included	Kohler models			

*Note: Battery box cannot be mounted at the factory but can be shipped with the unit for custom mounting. Consult factory for more information.