

8-Gallon / Base-Mount

Single or Two Stage – Gasoline

Compressor Pump:

Cast iron compressor pump ■ Splash lubricated ■ Stainless-steel braided discharge hose ■ Large canister intake filter ■ Oil level sight indicator

Generator:

Brushless alternator ■ Total harmonic distortion (THD) less than 5% ■ 100% copper windings ■ Comes standard with (2) 120V, 20A and (1) 240V, 20A receptacles (Two-stage models)

Frame:

Powder coated 8-gallon twin tank receivers (Portable and stationary models) ■ 3/16-inch base plate to reduce vibration ■ 16-gauge powder coated two-piece belt guard ■ 13-inch flat-free tires (Two-stage portable models) (10-inch on AG1-PH65-08M1)


Components:

Regulator and two gauges for tank and outlet pressure ■ Manual drain valves for proper maintenance ■ 12 or 16 1/2-inch fly wheel ■ Quality pilot valve unloader


Limited Warranties:

1 year Mi-T-M engine ■ 2 year alternator ■ 2 year pump exchange (see page 77 for more information) ■ 3 year Honda and Kohler engines

Ideal for jobsites and work trucks, the air compressor/generator combination units go a long way to increasing productivity. Install a stationary unit in your service truck and you'll have everything you need to operate air tools and power electrical tools.

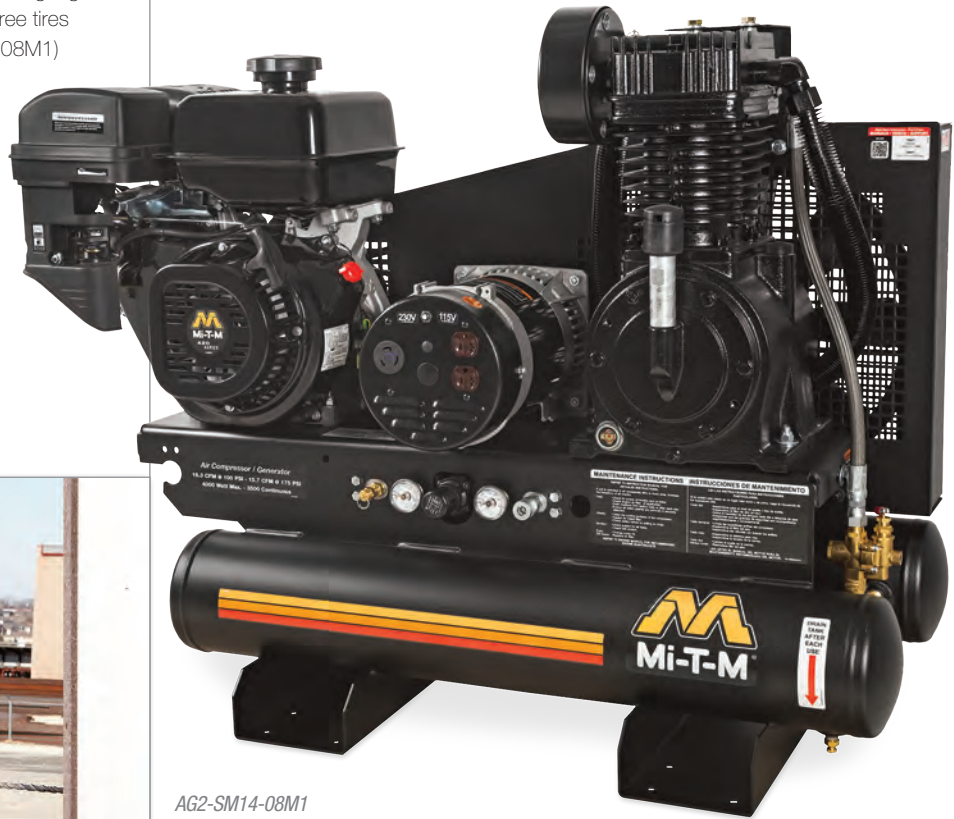

AG2-SM14-08M1



PORTABLE MODELS	ALTERNATOR WATTAGE						RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
	CFM @ 90 PSI	CFM @ PSI	MAX. AC OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD							
AG1-PH65-08M1	11.9	10.9 @ 125	1800 watts	600 watts	1600 watts	(2) NEMA 5-20R	196cc Honda GX200 OHV	Single stage	44.5x26x27.5in.	257 lb.	207 lb.	
AG2-PH13-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	52x28x34in.	450 lb.	375 lb.	
AG2-PK14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	52x28x34in.	450 lb.	375 lb.	
AG2-PM14-08M1	16.4	15.7 @ 175*	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	52x28x34in.	450 lb.	375 lb.	

*Equipped with 150-PSI maximum rated regulator.

8-Gallon / Base-Mount

Single or Two Stage – Gasoline



AG2-SH13-B

STATIONARY MODELS			ALTERNATOR WATTAGE			RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS		
MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. AC OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				(LxWxH)	SHIP WT.	NET WT.
AG2-SH13-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	44x22x34in.	465 lb.	365 lb.
AG2-SK14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	44x22x34in.	465 lb.	365 lb.
AG2-SM14-08M1	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	44x22x34in.	465 lb.	365 lb.

BASE-MOUNT MODELS			ALTERNATOR WATTAGE			RECEPTACLES	DISPLACEMENT/ENGINE	COMPRESSOR	DIMENSIONS		
MODEL NUMBER	CFM @ 90 PSI	CFM @ 175 PSI*	MAX. AC OUTPUT	CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				(LxWxH)	SHIP WT.	NET WT.
AG2-SH13-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	389cc Honda GX390 OHV	Two stage	47x22x28in.	390 lb.	325 lb.
AG2-SK14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	429cc Kohler CH440 OHV	Two stage	47x22x28in.	390 lb.	325 lb.
AG2-SM14-B	16.4	15.7	4000 watts	2300 watts	3500 watts	(2) NEMA 5-20R, (1) NEMA L6-20R	420cc Mi-T-M OHV	Two stage	47x22x28in.	390 lb.	325 lb.

*Equipped with 150-PSI maximum rated regulator.

Accessories & Options:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
70-0357	Engine oil drain extension	AG1-PH65-08M1	AX-0072*	Electric start - battery box and cables included, battery not included	Kohler models
70-0358	Engine oil drain extension	Two stage models	AX-0073	Electric start - battery, box and cables not included	Mi-T-M engine models
854-0093	Service truck mount kit - recommended for models that are mounted in service truck applications	Two stage portable & stationary models	AX-0074*	Electric start - battery box and cables included, battery not included	Mi-T-M engine models
AW-6000-1002	Equipment cover	All models	AX-0075	Idle down - includes electric start - battery not included	Mi-T-M engine models
AX-0019	Electric start - battery, box and cables not included	Two stage Honda models	IX-0055	Remote start/choke: 6-ft. wire extension for key switch. You will also need to order electric start option, AX-0019 or idle down option, AX-0068.	Two stage Honda models
AX-0028	Lifting hook	Two stage portable & stationary models	IX-0059	Remote start/choke: 6-ft. wire extension for key switch, sealed cable. You will also need to order electric start option, AX-0019 or idle down option, AX-0068.	Two stage Honda models
AX-0063	Lifting hook	Base-mount models			
AX-0064*	Electric start - battery box and cables included, battery not included	Two stage Honda models			
AX-0068	Idle down - includes electric start - battery not included	Two stage Honda models			
AX-0071	Electric start - battery, box and cables not included	Kohler models			

*Note: Battery box cannot be mounted at the factory but can be shipped with the unit for custom mounting. Consult factory for more information.