

Gun/Hose And Quick Connect Assembly Sheet

Vented Oil Cap



1. Remove red unvented oil cap as shown.



2. Replace with yellow vented oil cap found in accessory bag.

Quick Connect



1. Remove red cap from outlet as shown.



2. Screw on quick connect found in accessory bag.




3. Tighten quick connect with 1" wrench.



Accessory Bag.

Gun/Hose Assembly

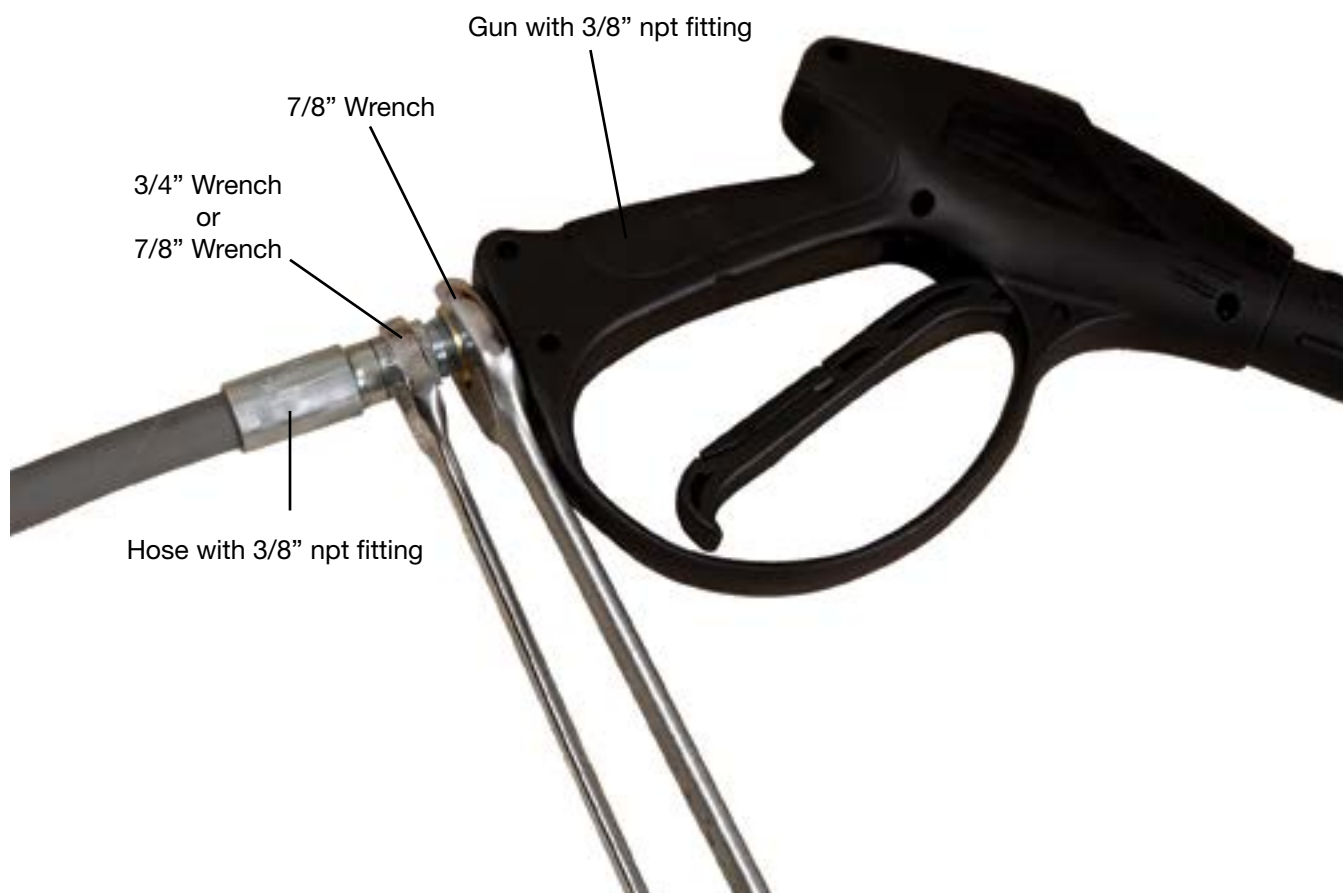

1. Screw gun and hose threads together by hand turning clockwise until hand tight. Hose threads already have pipe-sealing tape applied to them.
2. Use a 3/4 inch wrench on the hose fitting. Use a 7/8 inch wrench on the gun fitting. Tighten clockwise until snug.
3. Gun – Hose Assembly is ready for use.

⚠ WARNING

⚠ WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov